



SGW-TE TYPE

— High Rigidity Wide Type —



part number structure

example **SGW 21 TE B 2 T1 -589 P/W2 FS LB F-KGLA**

SGW type

size

TE typeblock

seal (refer to page A-14)

blank: with side-seals**B**: with side-seals + under-seals

number of blocks attached to one rail

preload symbol (refer to page A-76)

blank: standard**T1**: light**T2**: medium

total length of rail

accuracy grade (refer to page A-75)

blank: standard**H**: high**P**: precisionsymbol for grease
(refer to page Eng-40~)**blank**: standard grease**KGLA**: lithium-based grease**KGU**: urea-based grease**KGF**: anti-fretting grease

with rail mounting hole caps(refer to page A-17)

with low temperature black chrome treatment

with Fiber Sheet (refer to page A-18)

symbol for number of axes*


blank: single axis**W2**: 2 parallel axes**W3**: 3 parallel axes

*The symbol for the number of axes does not mean the number of rails ordered.

part number	assembly dimensions		block dimensions													grease fitting
	H	W	B	L ₁	L ₂	P ₁	P ₂	S	D	F	T	b	E	T ₁		
	mm	mm	mm	mm	mm	mm	mm		mm	mm	mm	mm	mm	mm		
SGW17TE	17	13.5	60	51	33.6	53	26	M4	3.3	3.2	6	14.5	2.5	4	pressed fitting	
SGW21TE	21	15.5	68	58	40	60	29	M5	4.4	3.7	8	18	12	4.5	B-M6F	
SGW27TE	27	19	80	71.8	51.8	70	40	M6	5.3	6	10	24		6		
SGW35TE	35	25.5	120	106.6	77.6	107	60	M8	6.8	8	14	31		8		

part number	standard rail length									
	L mm									
SGW17	110	150	190	230	270	310	350	390	430	590
SGW21	130	180	230	280	330	380	430	480	530	730
SGW27	160	220	280	340	400	460	520	640	760	1,000
SGW35	280	360	440	520	600	680	760	920	1,080	1,400

Rails exceeding the maximum specified length may be fabricated if joints are used. Please contact NB for assistance.

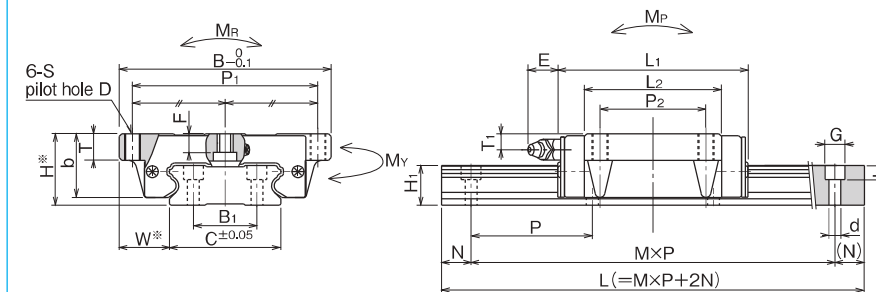

M: number of pitches

*Please refer to page A-75 for accuracy.

guide rail dimensions					basic load rating		allowable static moment			mass		block size	
H ₁	C	B ₁	d×G×h	N	P	dynamic C	static Co	M _P	M _Y	M _R	block		guide rail
mm	mm	mm	mm	mm	mm	kN	Co kN	M _{P2} N · m	M _{Y2} N · m	N · m	kg		rail kg/m
9	33	18	4.5×7.5×5.3	15	40	4.82	8.56	42.8 261	42.8 261	160	0.14	2.05	17
11	37	22			50	7.01	12.1	72.3 418	72.3 418	253	0.23	2.84	21
15	42	24		20	60	12.9	21.5	171 931	171 931	496	0.46	4.43	27
19	69	40	7×11×9		80	30.6	48.5	578 3.100	578 3.100	1,850	1.35	9.32	35

M_{P2} and M_{Y2} are allowable static moments when two blocks are used in close contact. 1kN≒102kgf 1N · m≒0.102kgf · m

								maximum length
								mm
670	750	830	950	1,070	1,190	1,310		2,000
830	930	1,030	1,180	1,330	1,480			2,000
1,180	1,360	1,540	1,720	1,900				3,000
1,640	1,880	2,120						3,000