




Product
Specification
**Positioning
Stages**



Dovetail Guiding ◉ X-Axis ◉ Feeding Screw Type

Dovetail Stage | X-Axis

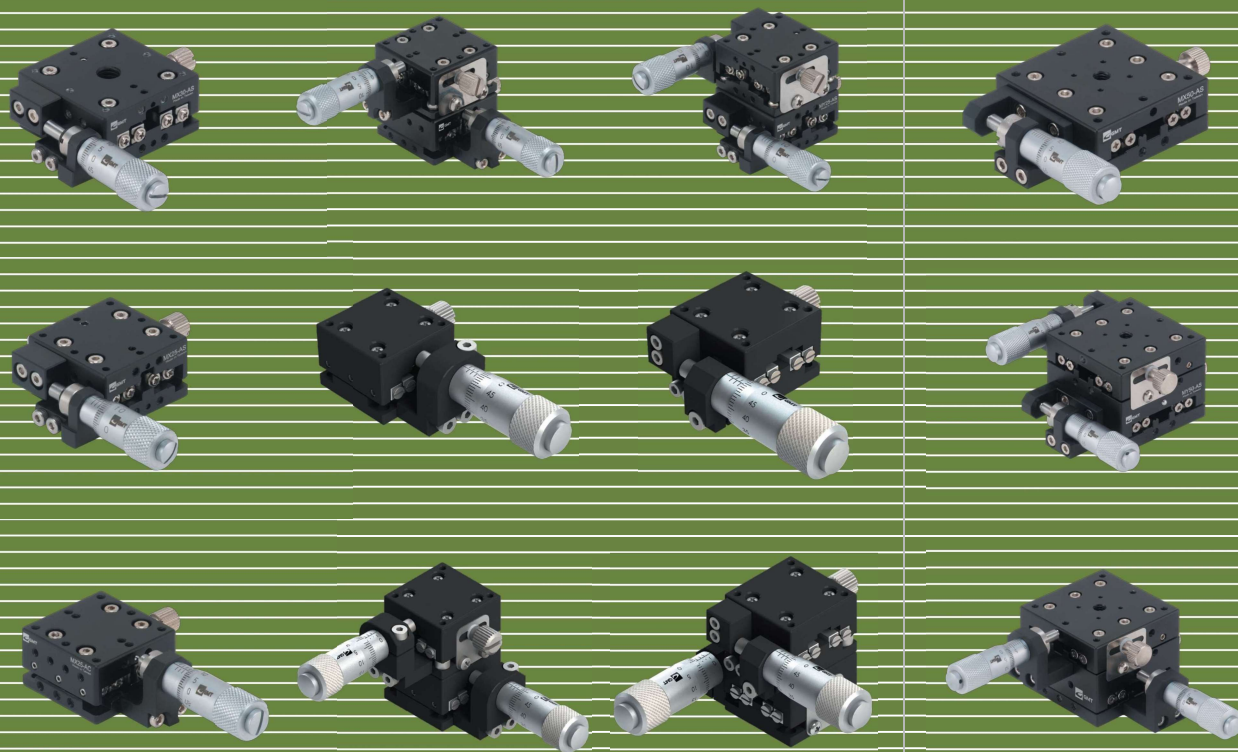


Product Specification


MC1G-525C(F)

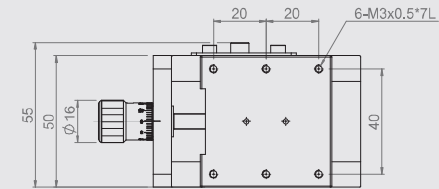



Knob type :



MC1G-525F(Fit PITCH0.25)



MC1G-525C(Fit PITCH0.5)




Specification


Unit : mm

Model No.	Table Size	Base Dimensions	Adjustment Structure			Straightness Accuracy	Parallel	Dynamic Parallel	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
			Movement Per Knob Cycle	Knob Mini. Reading	Travel Stroke							
MC1G-525C	50*50	50*79	0.5	0.01/div.	±11	0.03	0.05	0.04	5	0.27	Aluminum alloy	Black anodized
MC1G-525F			0.25	0.005/div.								

MC1G-535C(F)

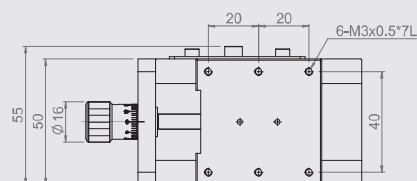



Knob type :



MC1G-535C(Fit PITCH0.5)



MC1G-535F(Fit PITCH0.25)





Specification

Unit : mm

Model No.	Table Size	Base Dimensions	Adjustment Structure			Straightness Accuracy	Parallel	Dynamic Parallel	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
			Movement Per Knob Cycle	Knob Mini. Reading	Travel Stroke							
MC1G-535C	50*50	50*89	0.5	0.01/div.	±16	0.03	0.05	0.04	5	0.29	Aluminum alloy	Black anodized
MC1G-535F			0.25	0.005/div.								

MC7G-4050C(F)

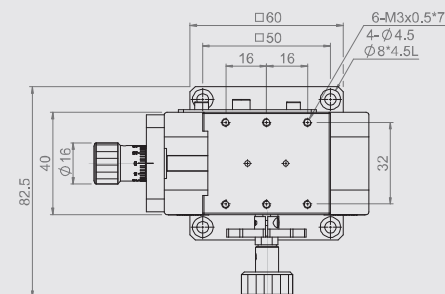


Knob type :



MC7G-4050C(Fit PITCH0.5)



MC7G-4050F(Fit PITCH0.25)

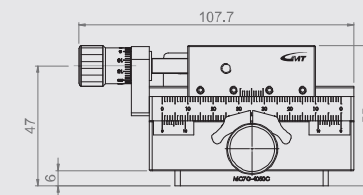

Specification

Unit : mm

Model No.	Table Size	Base Dimensions	Fine Tuning			Coarse Adjustment			Straightness Accuracy	Parallel	Dynamic Parallel	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
			Movement Per Knob Cycle	Knob Mini. Reading	Travel Stroke	Movement Per Knob Cycle	Minimum Reading	Travel Stroke							
MC7G-4050C	40*50	40*80	0.5	0.01/div.	±17.5	≈ 18 mm	0.1mm / Vernier	±30	0.03	0.05	0.04	4	0.5	Aluminum alloy	Black anodized
MC7G-4050F			0.25	0.005/div.											