



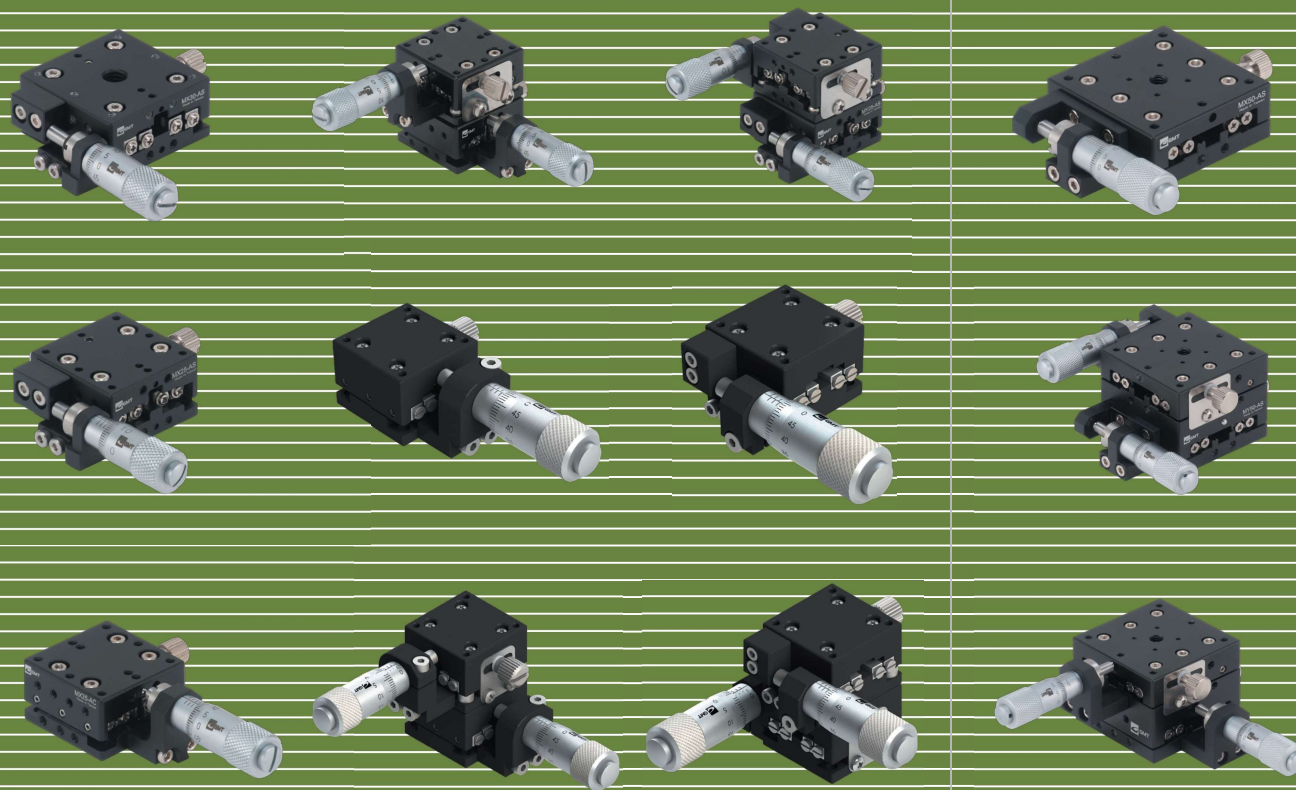

Product
Specification
**Positioning
Stages**

MCM-44

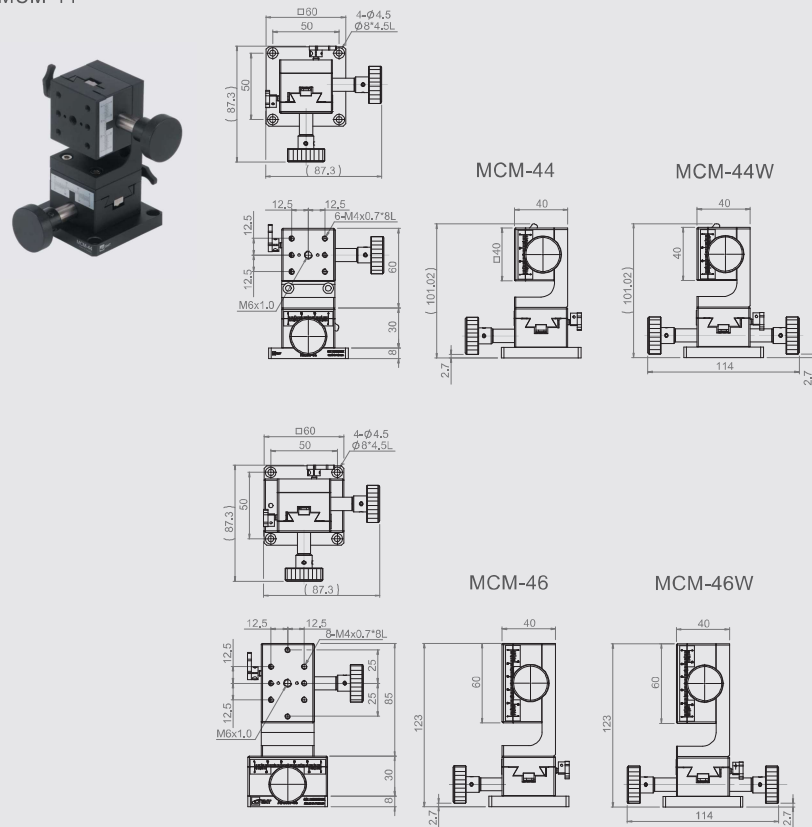


Specification

Unit : mm

Model No.	Table Size	Axis	Knob Type	Travel Stroke	Minimum Reading	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MCM-44	40*40	X+Z axis	Single	±10	0.1 mm / Vernier	30	2	0.5	Aluminum alloy	Black anodized
MCM-44W			Dual					0.55		
MCM-46	40*60		Single	±15				0.67		
MCM-46W			Dual					0.72		

MCM-49

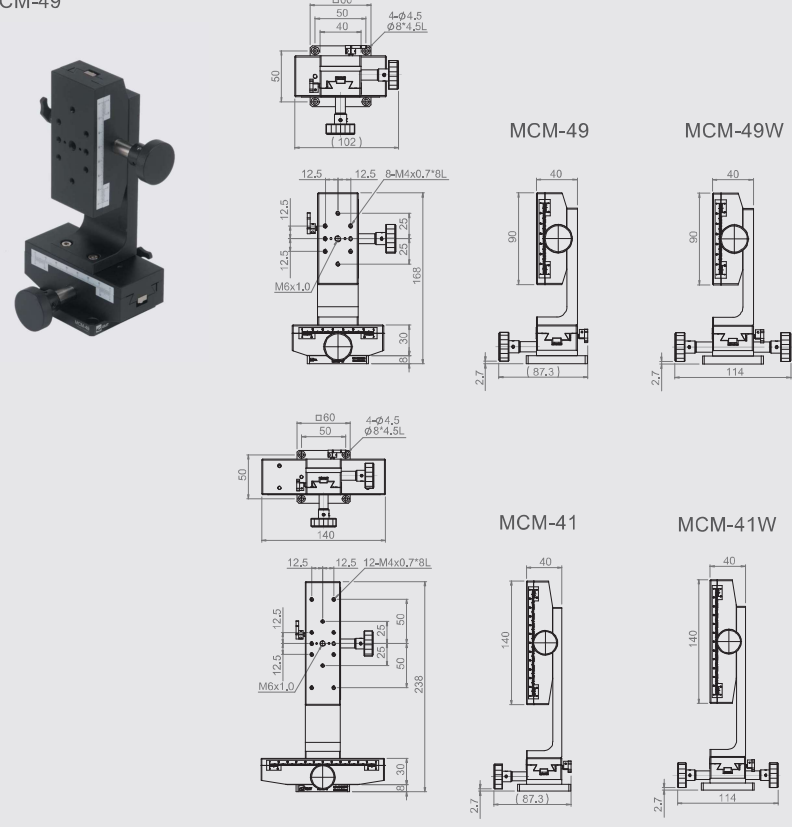


Specification

Unit : mm

Model No.	Table Size	Axis	Knob Type	Travel Stroke	Minimum Reading	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish				
MCM-49	40*90	X+Z axis	Single	±30	0.1 mm / Vernier	30	2	0.87	Aluminum alloy	Black anodized				
MCM-49W			Dual					0.92						
MCM-41	40*140		Single	±50				1.23						
MCM-41W			Dual					1.28						

MCM-44L

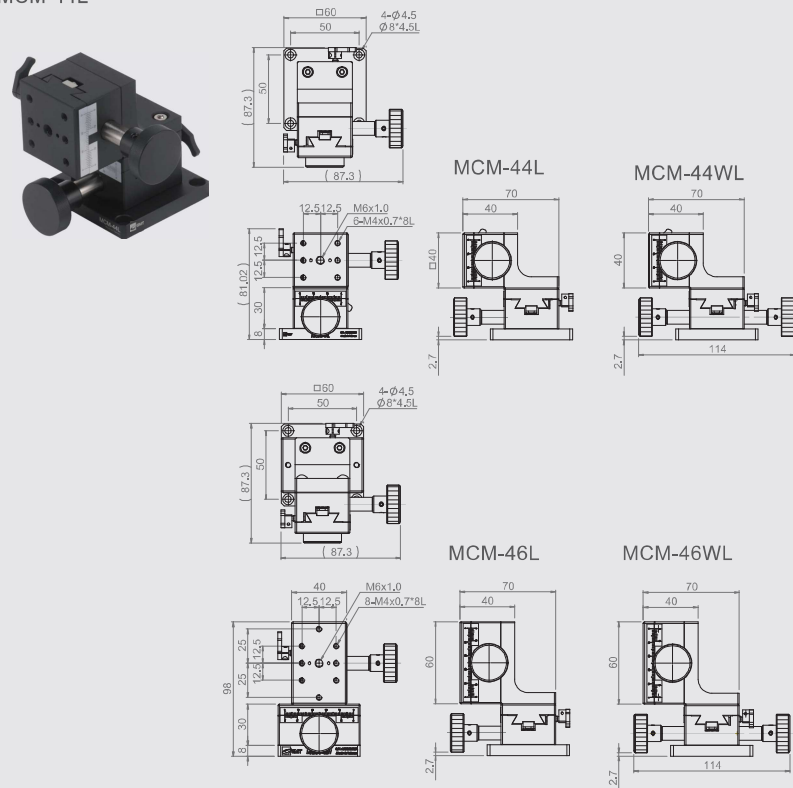


Specification

Unit : mm

Model No.	Table Size	Axis	Knob Type	Travel Stroke	Minimum Reading	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MCM-44L	40*40	X+Z axis	Single	X: ±10 Z: 10	0.1 mm / Vernier	30	2	0.47	Aluminum alloy	Black anodized
MCM-44WL			Dual					0.52		
MCM-46L	40*60		Single	X: ±15 Z: 15				0.64		
MCM-46WL			Dual					0.68		

MCM-49L

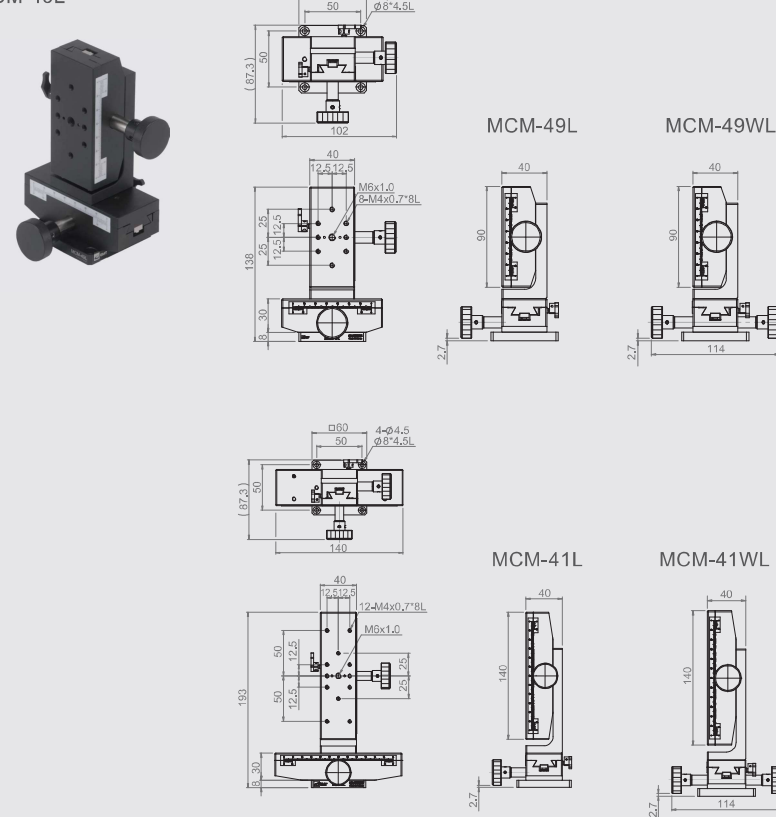


Specification

Unit : mm

Model No.	Table Size	Axis	Knob Type	Travel Stroke	Minimum Reading	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MCM-49L	40*90	X+Z axis	Single	X: ±30 Z: 30	0.1 mm / Vernier	30	2	0.85	Aluminum alloy	Black anodized
MCM-49WL			Dual					0.89		
MCM-41L	40*140		Single	X: ±50 Z: 50				1.18		
MCM-41WL			Dual					1.24		

MCT-44

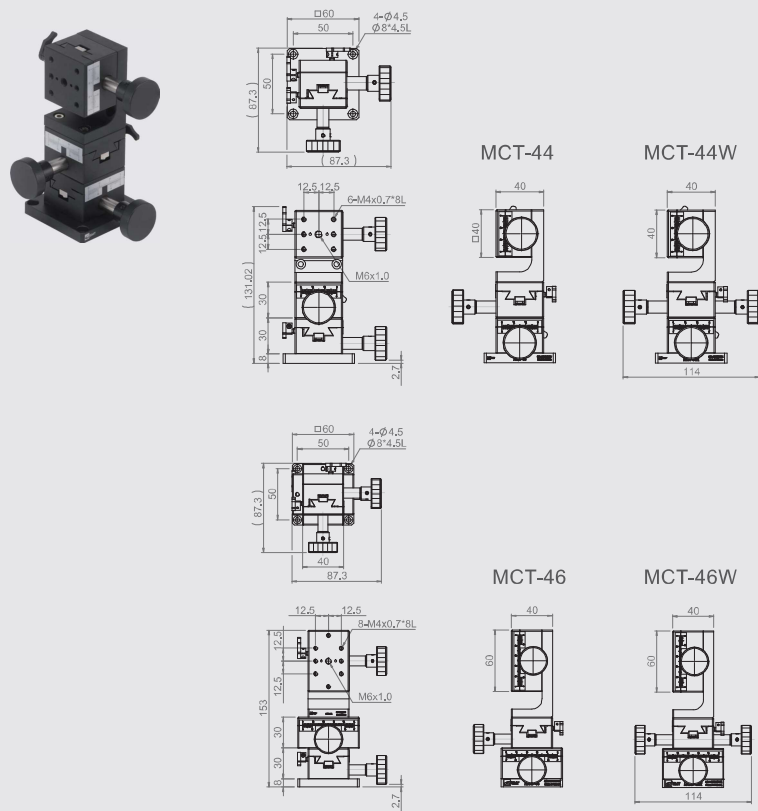


Specification

Unit : mm

Model No.	Table Size	Axis	Knob Type	Travel Stroke	Minimum Reading	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MCT-44	40*40	XY+Z axis	Single	±10	0.1 mm / Vernier	30	2	0.67	Aluminum alloy	Black anodized
MCT-44W			Dual					0.74		
MCT-46	40*60		Single	±15				0.9		
MCT-46W			Dual					0.98		

MCT-49

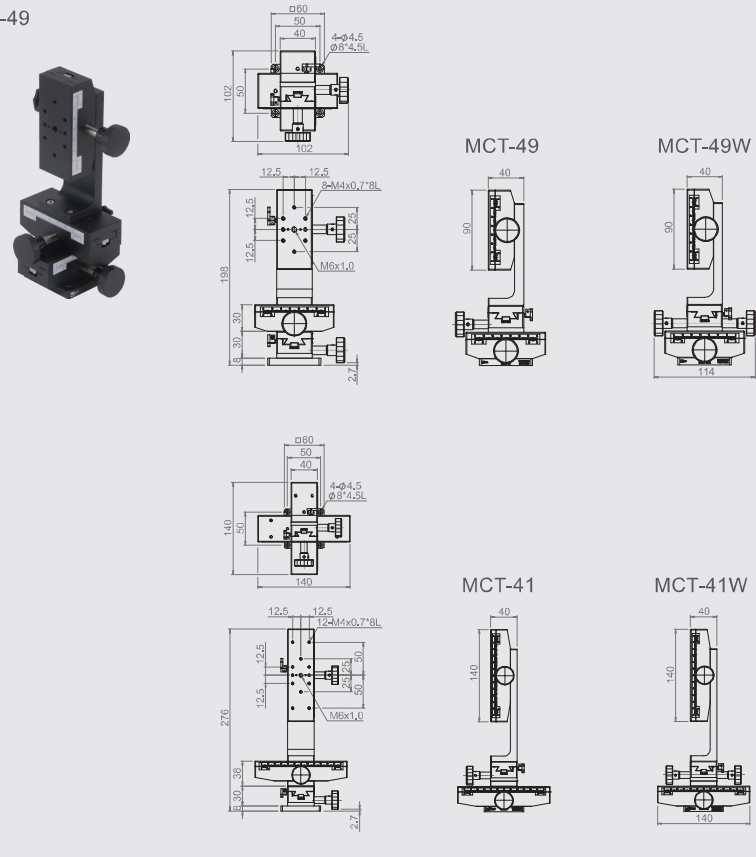


Specification


Unit : mm

Model No.	Table Size	Axis	Knob Type	Travel Stroke	Minimum Reading	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MCT-49	40*90	XY+Z axis	Single	±30	0.1 mm / Vernier	30	2	1.2	Aluminum alloy	Black anodized
MCT-49W			Dual					1.27		
MCT-41	40*140		Single	±50				1.74		
MCT-41W			Dual					1.82		


MCT-44L

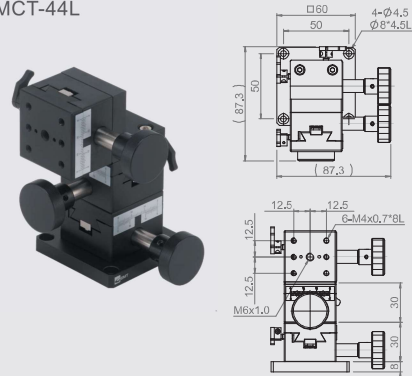



MCT-44L




MCT-44WL



MCT-46L

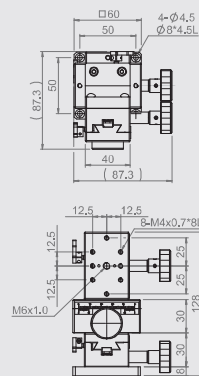

MCT-46WL




Specification


Unit : mm

Model No.	Table Size	Axis	Knob Type	Travel Stroke	Minimum Reading	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MCT-44L	40*40	XY+Z axis	Single	XY: ±10 Z: 10	0.1 mm / Vernier	30	2	0.64	Aluminum alloy	Black anodized
MCT-44WL			Dual					0.72		
MCT-46L	40*60		Single	XY: ±15 Z: 15				0.87		
MCT-46WL			Dual					0.94		


MCT-49L

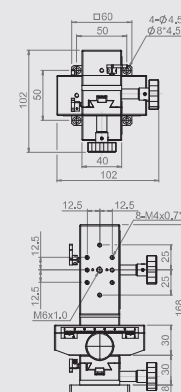


MCT-49L




MCT-49WL



MCT-41L

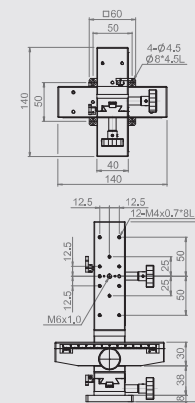

MCT-41WL



Specification

Unit : mm

Model No.	Table Size	Axis	Knob Type	Travel Stroke	Minimum Reading	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MCT-49L	40*90	XY+Z axis	Single	XY: ±30 Z: 30	0.1 mm / Vernier	30	2	1.17	Aluminum alloy	Black anodized
MCT-49WL			Dual					1.24		
MCT-41L	40*140		Single	XY: ±50 Z: 50				1.7		
MCT-41WL			Dual					1.78		