




Product
Specification
**Positioning
Stages**

MTB-80

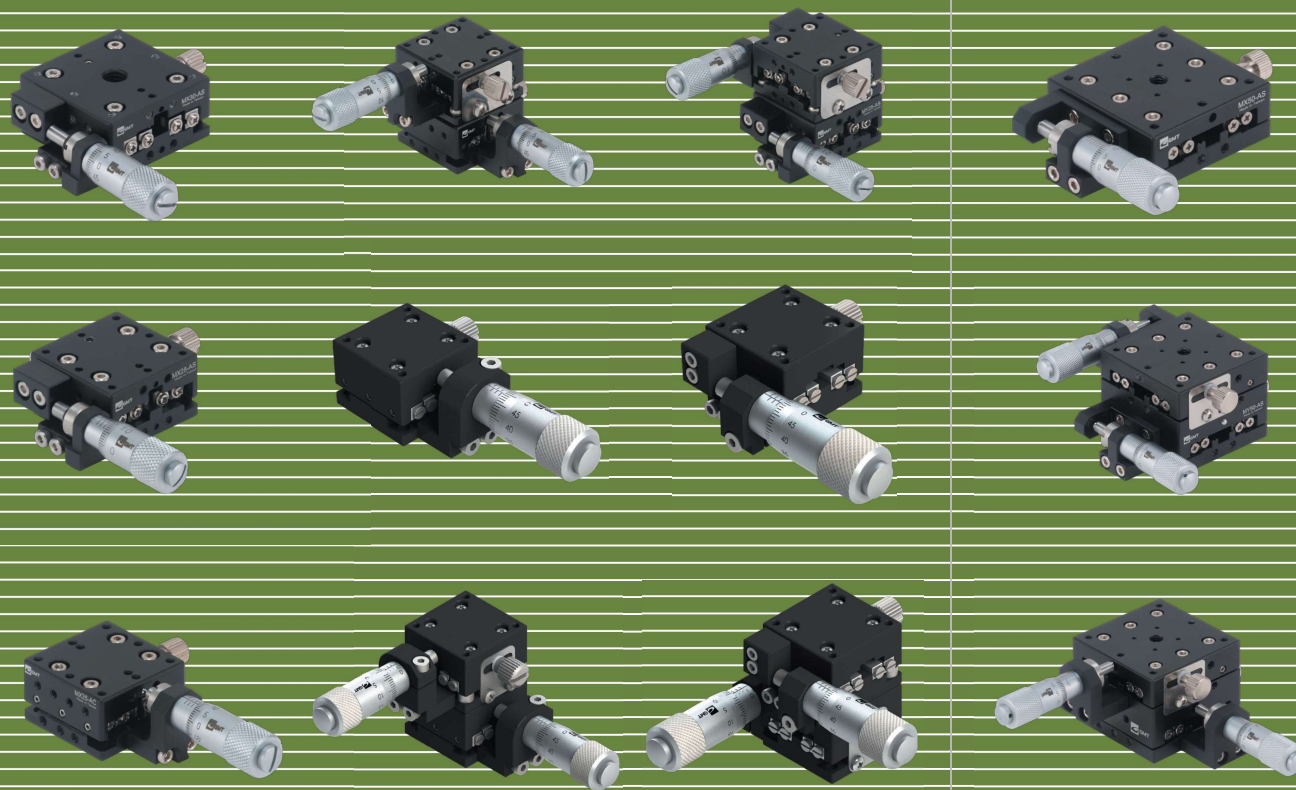


Specification

Unit : mm


Model No.	Table Size	Movement Direction	Transmission	Travel Stroke	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MTB-40	40*40	2 directions	0.54° per manual rotation	±2°	2	0.03	Aluminum alloy	Black anodized
MTB-60	60*60				4	0.15		
MTB-80	80*80				5	0.4		

★ Customized mounting holes are available in case the holes do not match.


MTB-40

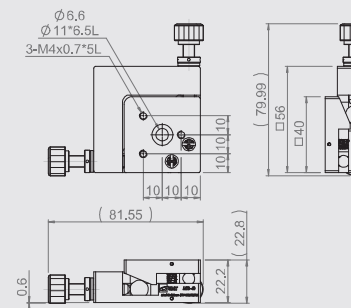

MTB-60

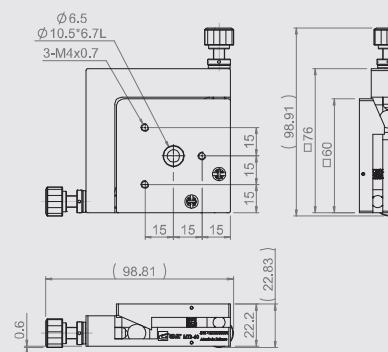

MTB-80

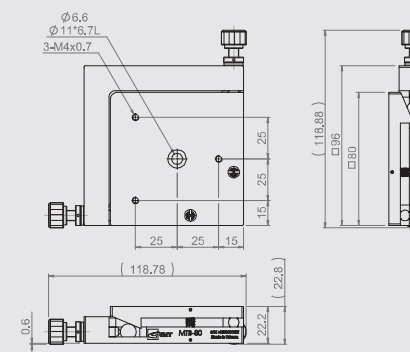

MTS-30



MTS-60



MTS-90



MTS-125




Specification


Unit : mm

Model No.	Table Size	Travel Direction	Transmission	Travel Stroke	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MTS-30	30*30	2 directions	1° 25' per manual rotation	±2°	2	0.03	Aluminum alloy	Black anodized
MTS-60	60*60		0° 40' per manual rotation		4	0.15		
MTS-90	90*90		0° 24' per manual rotation		5	0.4		
MTS-125	125*125		0° 15' per manual rotation		5	1.0		


MTS-30

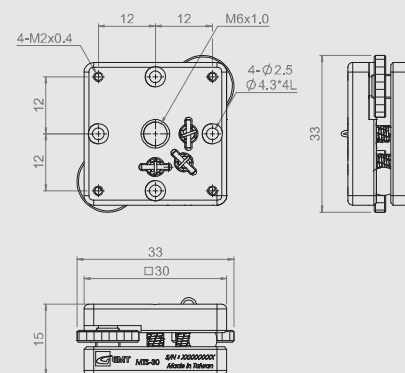

MTS-60

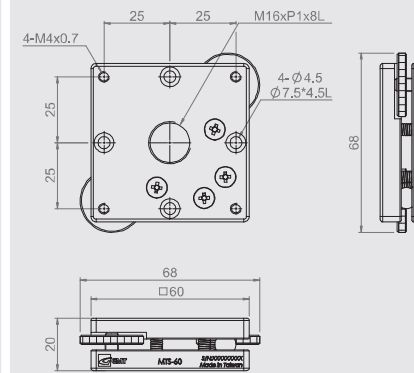

MTS-90

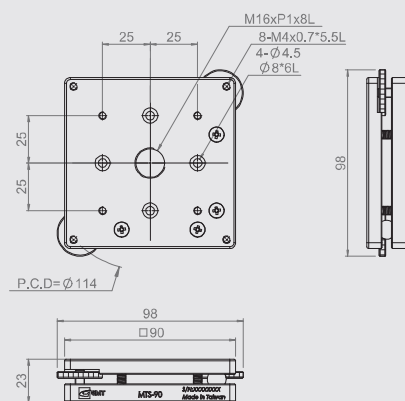

MTS-125

