




Product
Specification
**Positioning
Stages**

MXL30-AC

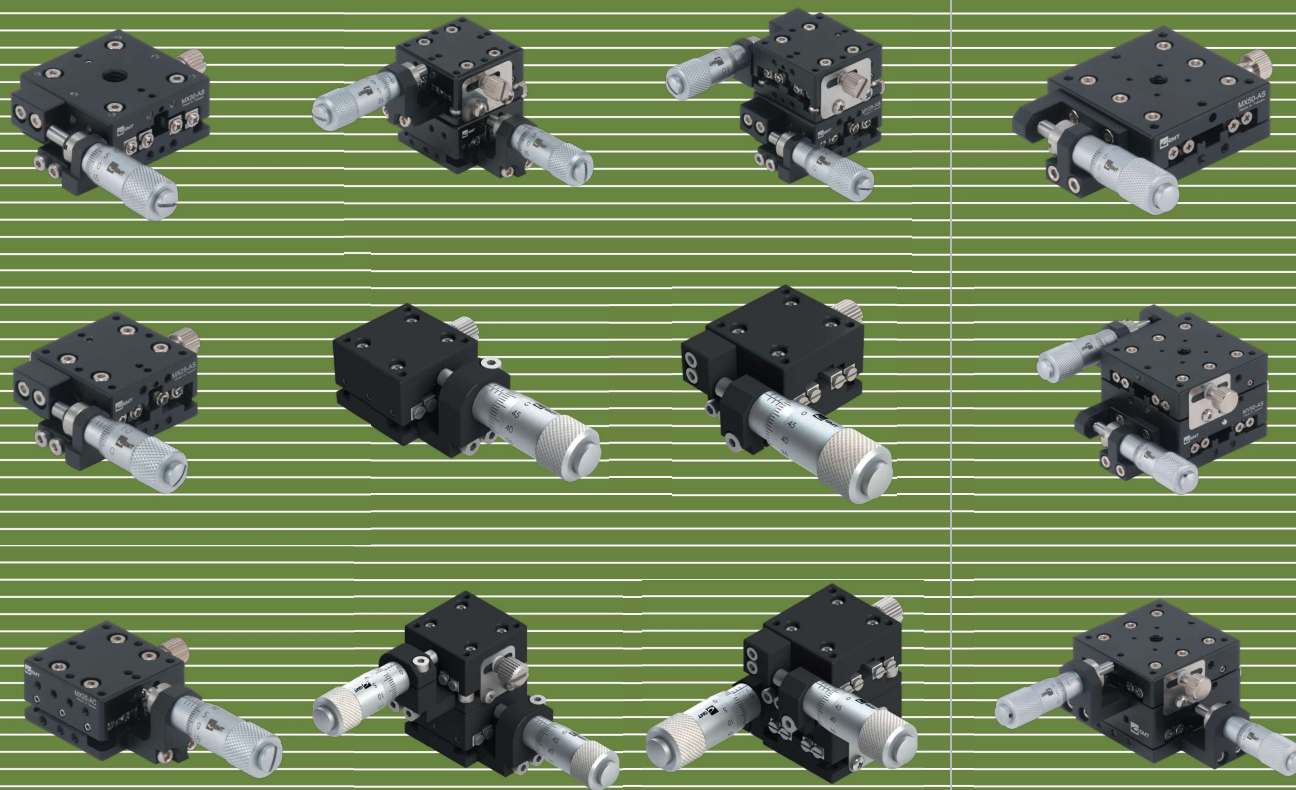


MXL30-AS



MYL30-AC



MYL30-AS




Specification



		Technical Specifications								
Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (µm)	Straightness Accuracy (µm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MXL30-AC	30*30	X-axis	Central	±3.2	10	3	3	0.04	Aluminum alloy	Black anodized
MXL30-AS			Side							
MYL30-AC		XY-axis	Central							
MYL30-AS			Side							

Unit : mm

MXL30-AC

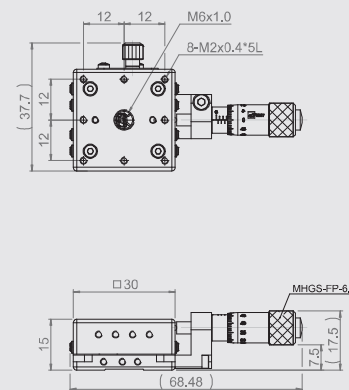


MXL30-AS

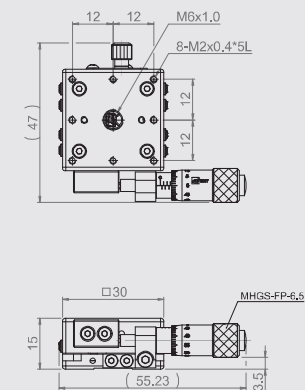


MX(Y)L30-A Mounting Dimensions

MYL30-AC

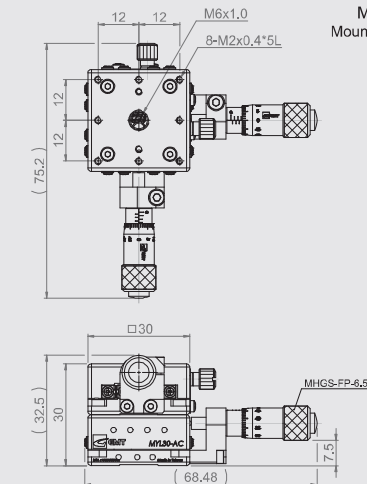

MYL30-AS

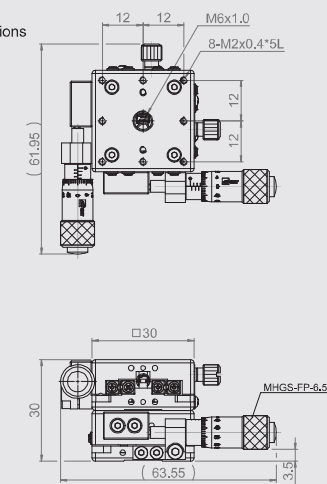

MXL60-AC




MXL60-AS



MYL60-AC



MYL60-AS




Specification


Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MXL60-AC	60*60	X-axis	Central	±6.5	10	3	5	0.3	Aluminum alloy	Black anodized
MXL60-AS			Side							
MYL60-AC		XY-axis	Central							
MYL60-AS			Side							


MXL60-AC

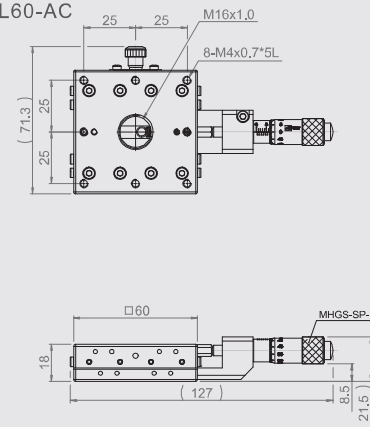


MXL60-AS

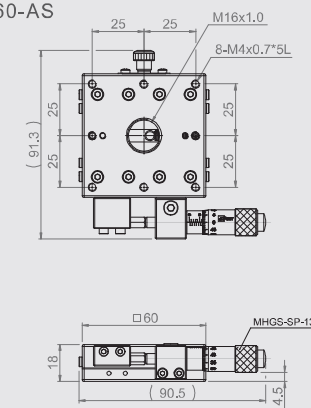


MYL60-AC

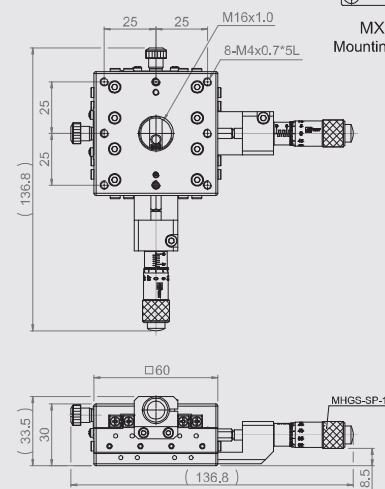


MYL60-AS

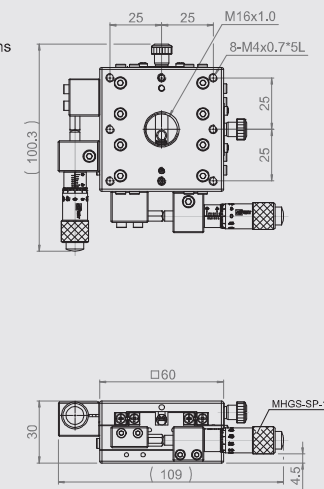


MX(Y)L60-A
Mounting Dimensions



MXL90-AC




MXL90-AS



MYL90-AC



MYL90-AS


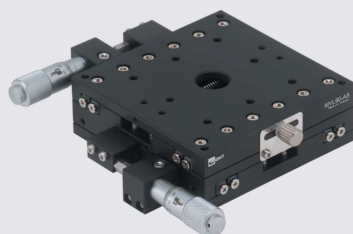


Specification



Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (µm)	Straightness Accuracy (µm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MXL90-AC	90°90	X-axis	Central	±7.5	10	3	8	0.45	Aluminum alloy	Black anodized
MXL90-AS			Side							
MYL90-AC		XY-axis	Central							
MYL90-AS			Side							

Unit : mm



MXL90-AC





MYL90-AC

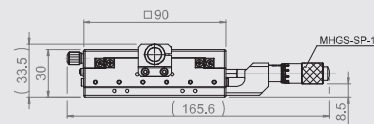

MXL90-AS




MYL90-AS

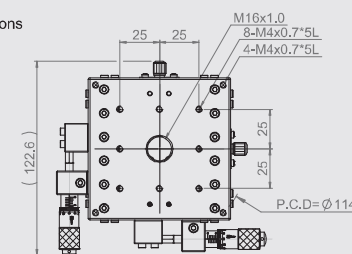


MX(Y)L90-A Mounting Dimensions

MXL125-AC




MXL125-AS



MYL125-AC



MYL125-AS




Specification


Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MXL125-AC	125*125	X-axis	Central	±12,5	10	3	15	1.1	Aluminum alloy	Black anodized
MXL125-AS			Side							
MYL125-AC		XY-axis	Central							
MYL125-AS			Side							


MXL125-AC

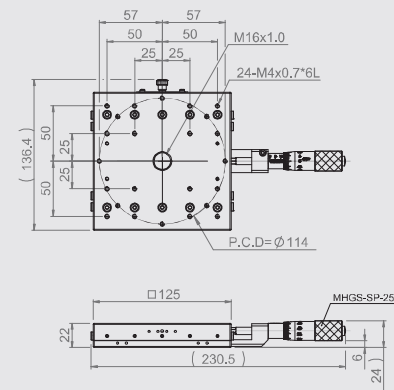


MXL125-AS

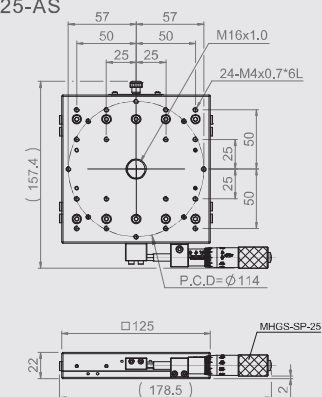

MYL125-AC

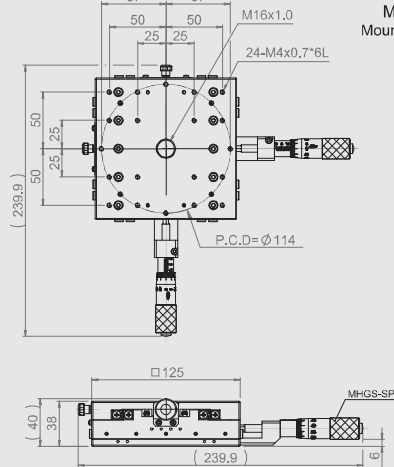

MYL125-AS

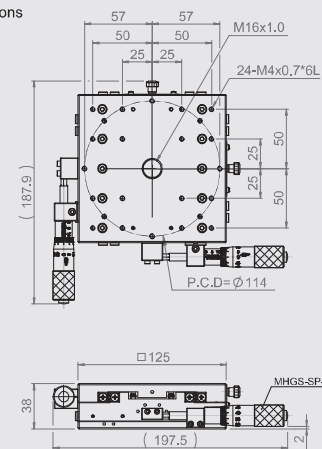

MX(Y)L125-A
Mounting Dimensions

