



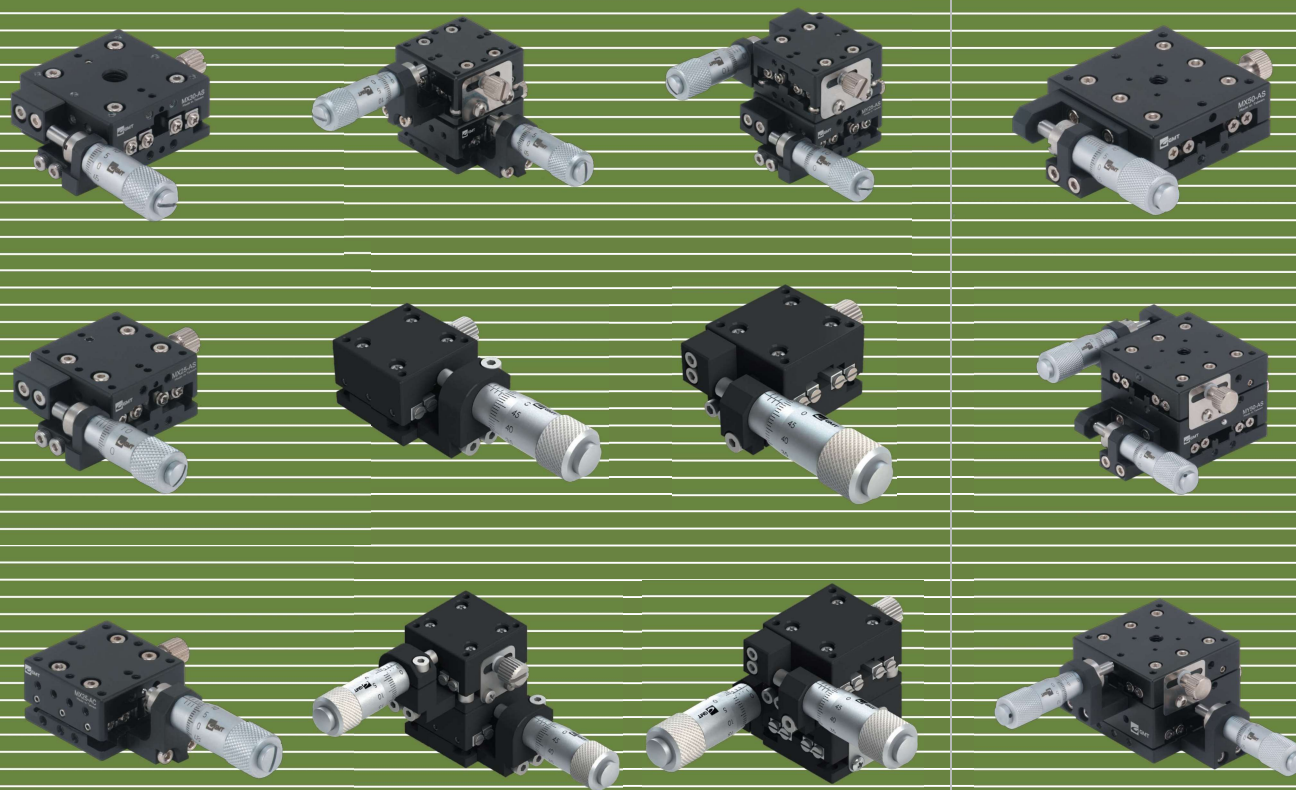


Product
Specification
**Positioning
Stages**


MX25-SC




MX25-SS



MY25-SC

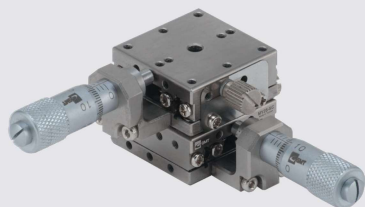

MY25-SS




Specification



Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX25-SC	25*25	X-axis	Central	±3.2	10	3	4	0.07	SUS 440C	Electroless nickel plating
MX25-SS			Side				3.9	0.14		
MY25-SC		XY-axis	Central				4	0.07		
MY25-SS			Side				3.9	0.14		

MX25-SC

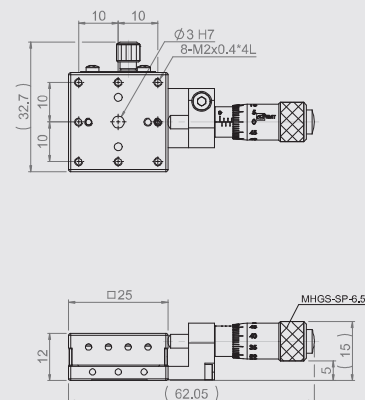


MX25-SS

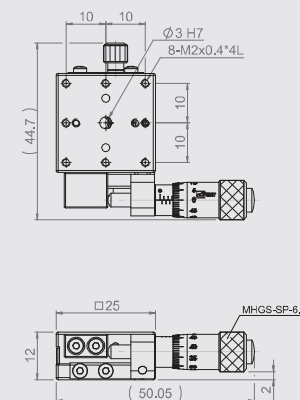


MX(Y)25-S
Mounting Dimensions

MY25-SC

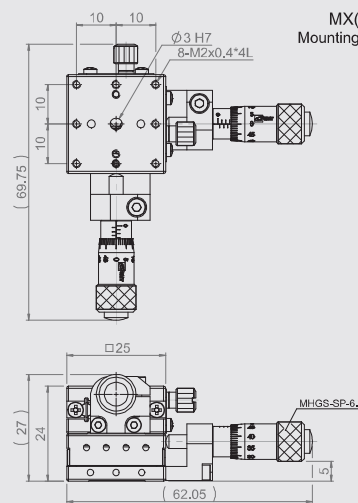

MY25-SS

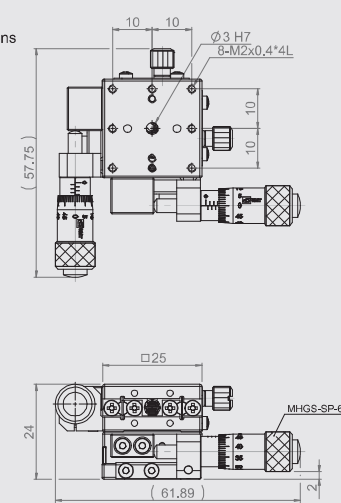

MX30-SC




MX30-SS



MY30-SC



MY30-SS




Specification


Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX30-SC	30*30	X-axis	Central	±3.2	10	3	6	0.08	SUS 440C	Electroless nickel plating
MX30-SS			Side							
MY30-SC		XY-axis	Central							
MY30-SS			Side							


MX30-SC

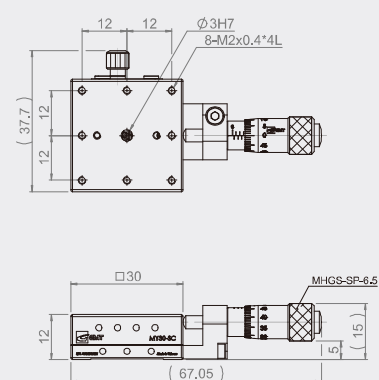


MX30-SS

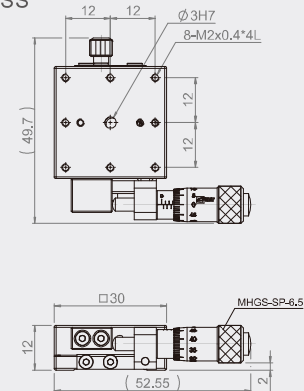


MY30-SC

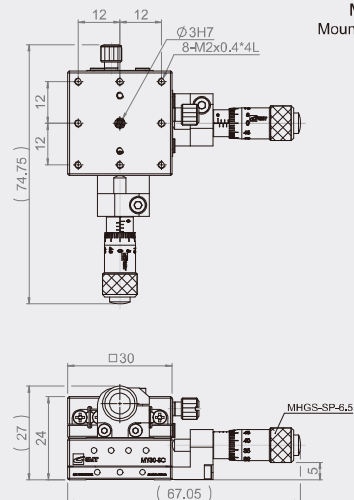

MY30-SS

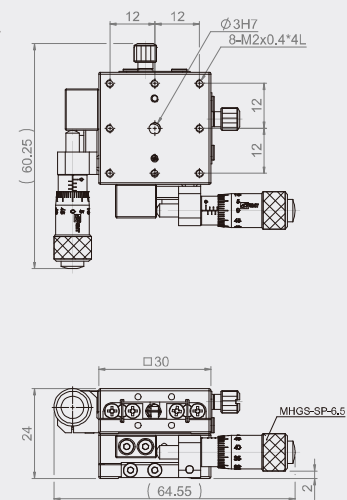

MX(Y)30-S
Mounting Dimensions



MX40-SC



MX40-SS



MY40-SC



MY40-SS




Specification



Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX40-SC	40*40	X-axis	Central	±6.5	10	3	10	0.23	SUS 440C	Electroless nickel plating
MX40-SS			Side				9.7	0.46		
MY40-SC		XY-axis	Central							
MY40-SS			Side							


MX40-SC

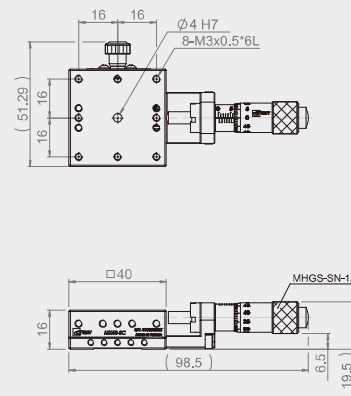


MX40-SS

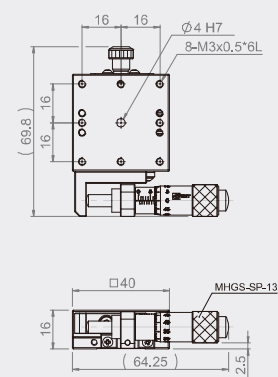

MY40-SC



MY40-SS

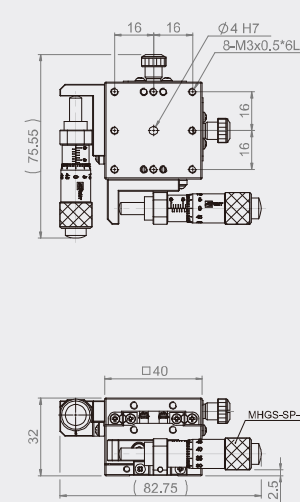

MX50-SC



MX50-SS



MY50-SC



MY50-SS




Specification


Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX50-SC	50*50	X-axis	Central	±6.5	10	3	15	0.28	SUS 440C	Electroless nickel plating
MX50-SS			Side							
MY50-SC		XY-axis	Central				14.7	0.56		
MY50-SS			Side							


MX50-SC

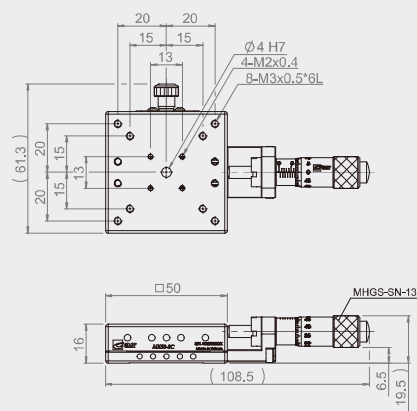


MX50-SS

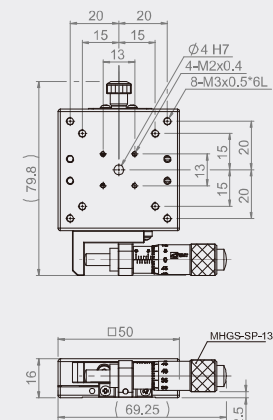

MY50-SC

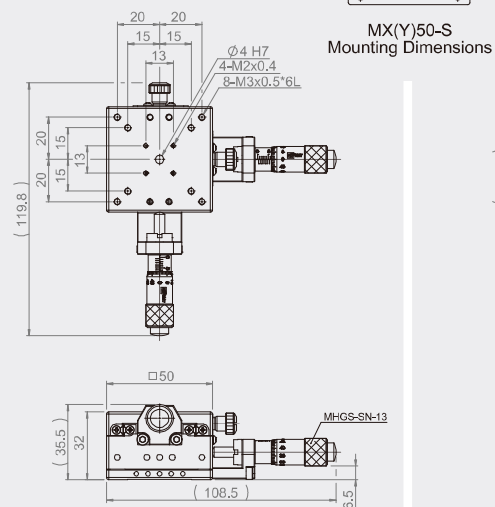

MY50-SS

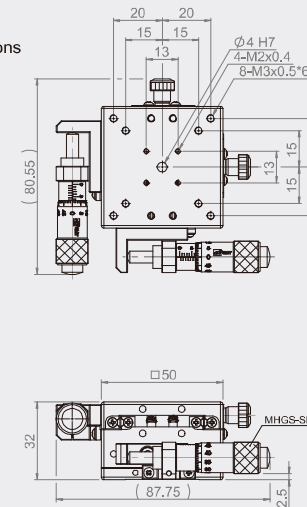

MX60-SC



MX60-SS



MY60-SC



MY60-SS




Specification


Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX60-SC	60*60	X-axis	Central	±6.5	10	3	20	0.4	SUS 440C	Electroless nickel plating
MX60-SS			Side							
MY60-SC		XY-axis	Central				19.6	0.8		
MY60-SS			Side							


MX60-SC

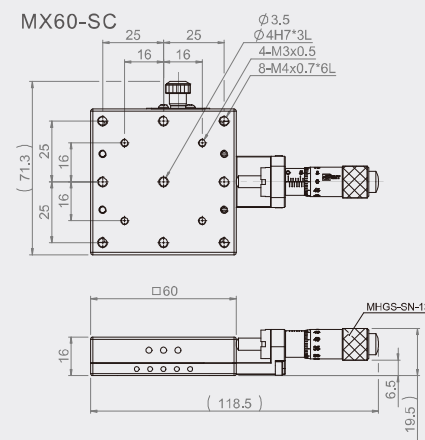


MX60-SS

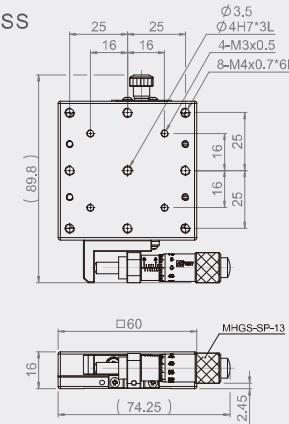


MY60-SC

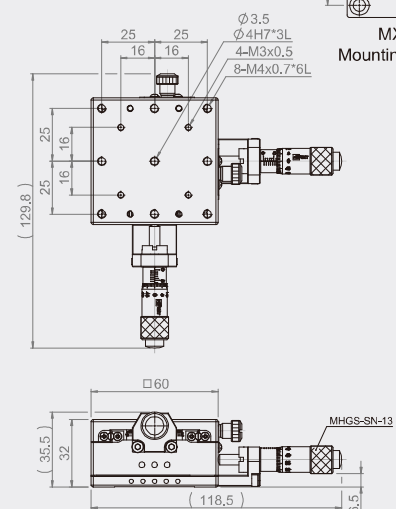

MY60-SS

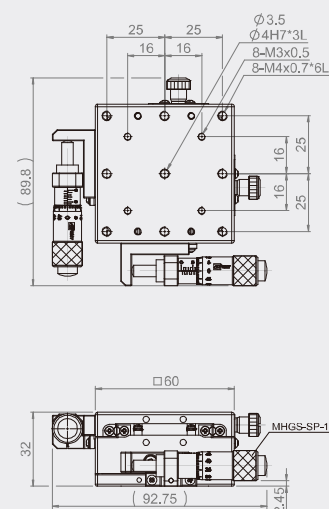

MX(Y)60-S
Mounting Dimensions



MX70-SC



MX70-SS



MY70-SC



MY70-SS




Specification



Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX70-SC	70*70	X-axis	Central	±6.5	10	3	23	0.58	SUS 440C	Electroless nickel plating
MX70-SS			Side							
MY70-SC		XY-axis	Central				22.4	1.16		
MY70-SS			Side							

Unit : mm

MX70-SC

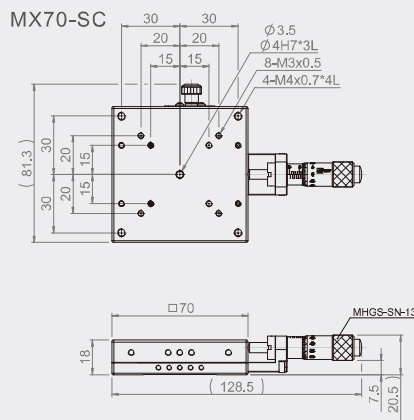


MX70-SS

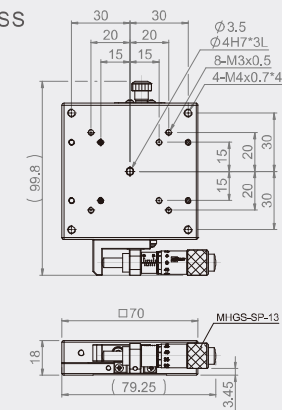


MX(Y)70-S Mounting Dimensions

MY70-SC

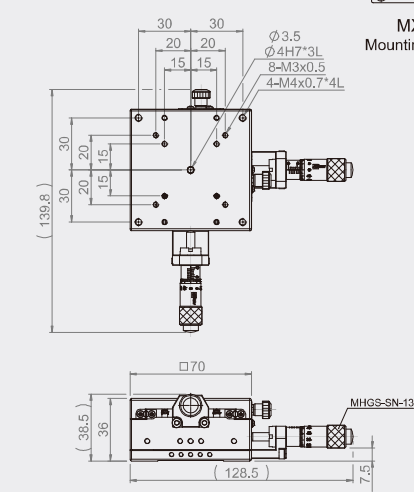

MY70-SS

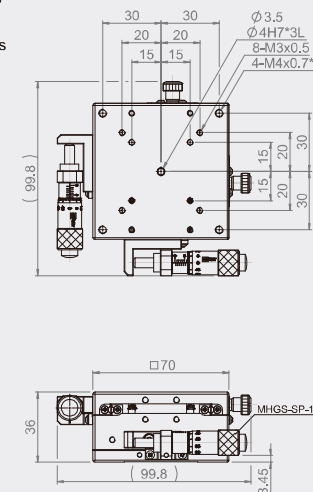


MX80-SC




MX80-SS



MY80-SC

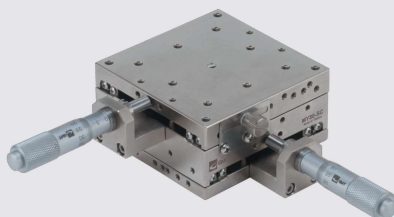

MY80-SS




Specification


Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX80-SC	80*80	X-axis	Central	±12.5	10	3	27	0.9	SUS 440C	Electroless nickel plating
MX80-SS			Side							
MY80-SC		XY-axis	Central							
MY80-SS			Side							


MX80-SC

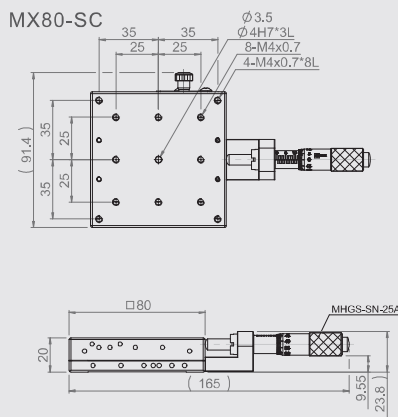


MX80-SS

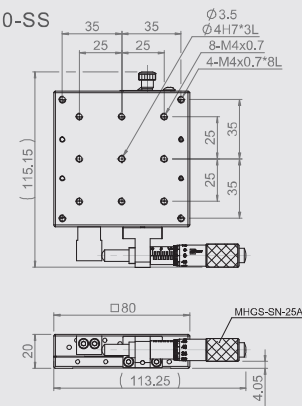


MY80-SC

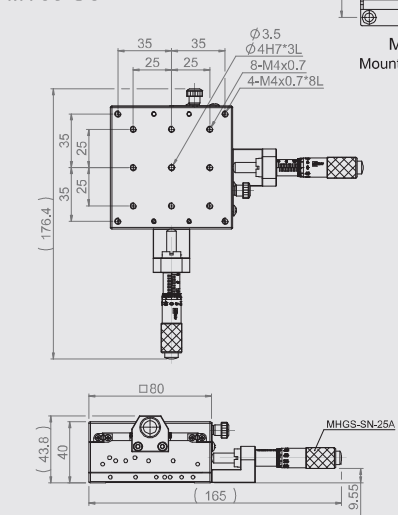


MY80-SS

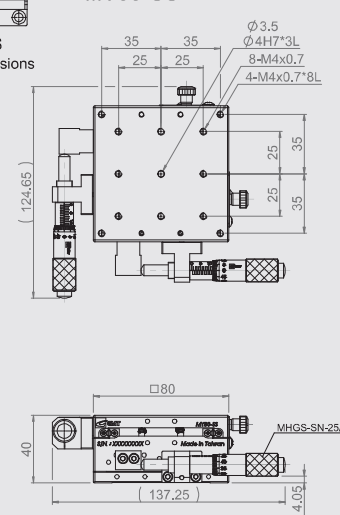

MX(Y)80-S
Mounting Dimensions



MX100-SC




MX100-SS



MY100-SC



MY100-SS




Specification


Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX100-SC	100*100	X-axis	Central	±12.5	10	3	35	1.33	SUS 440C	Electroless nickel plating
MX100-SS			Side							
MY100-SC		XY-axis	Central							
MY100-SS			Side							

Unit : mm


MX100-SC

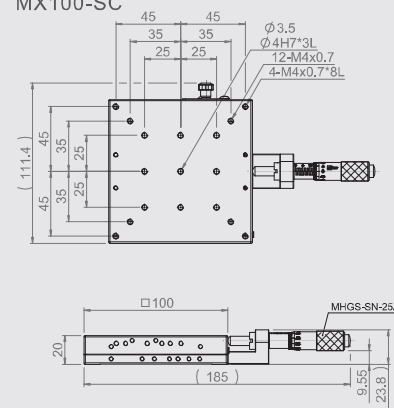


MX100-SS

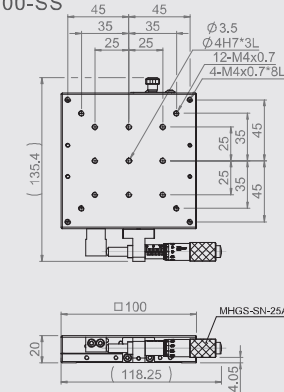

MY100-SC

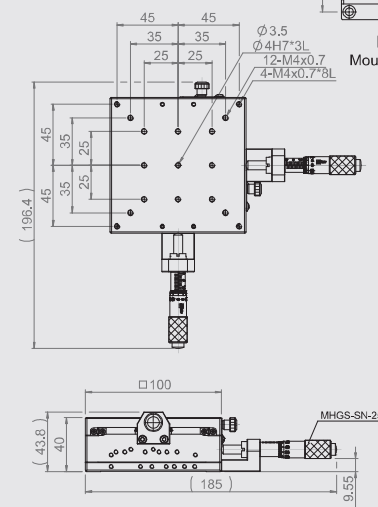

MY100-SS

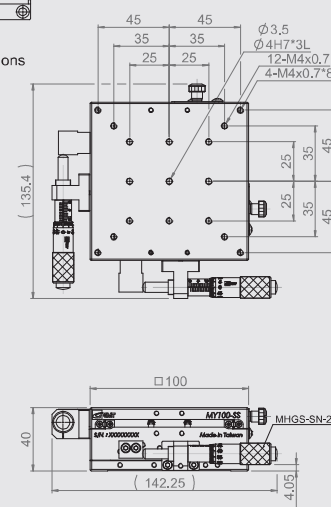

MX(Y)100-S
Mounting Dimensions

