




Product
Specification
**Positioning
Stages**

MX60L-SS-28

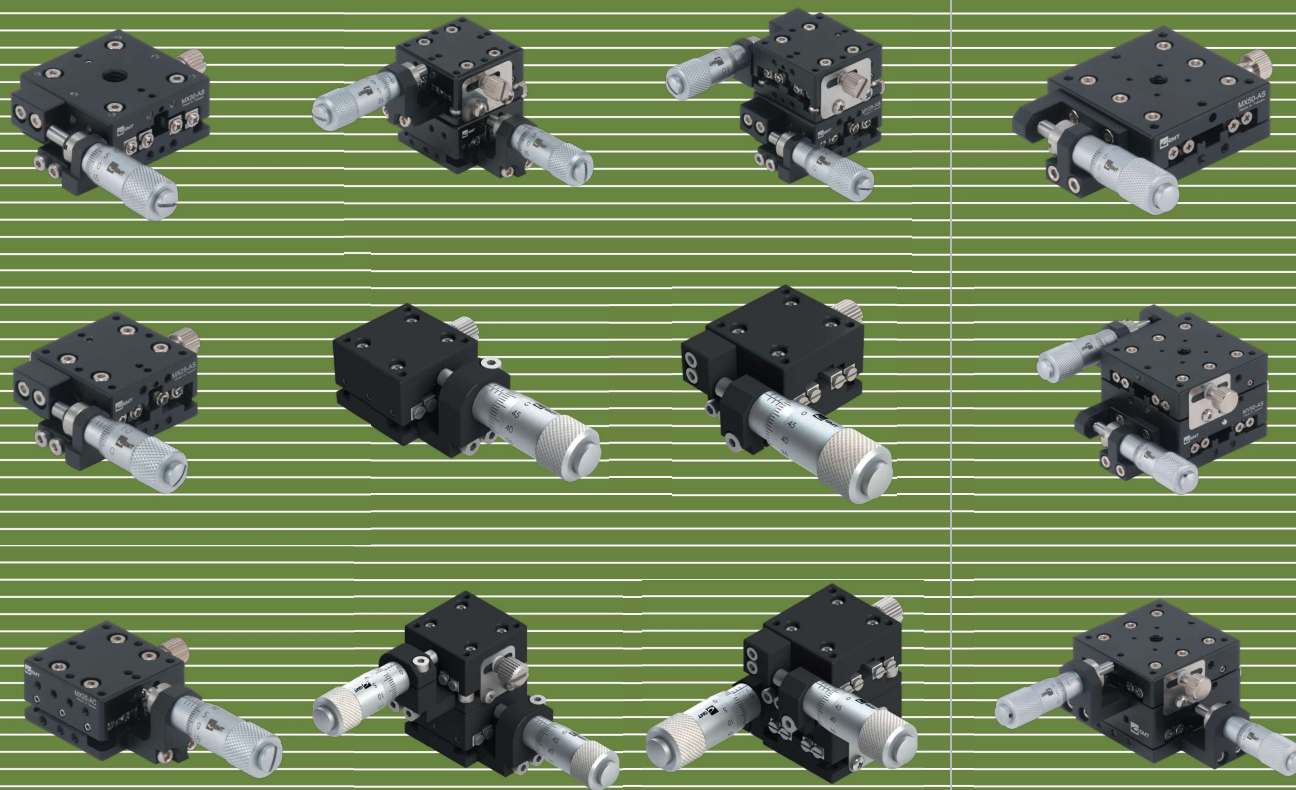

Specification

Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX60L-SS-28	60*120	X-axis	Side	±12.5	10	3	16	0.76	SUS440C	Electroless nickel plating

