



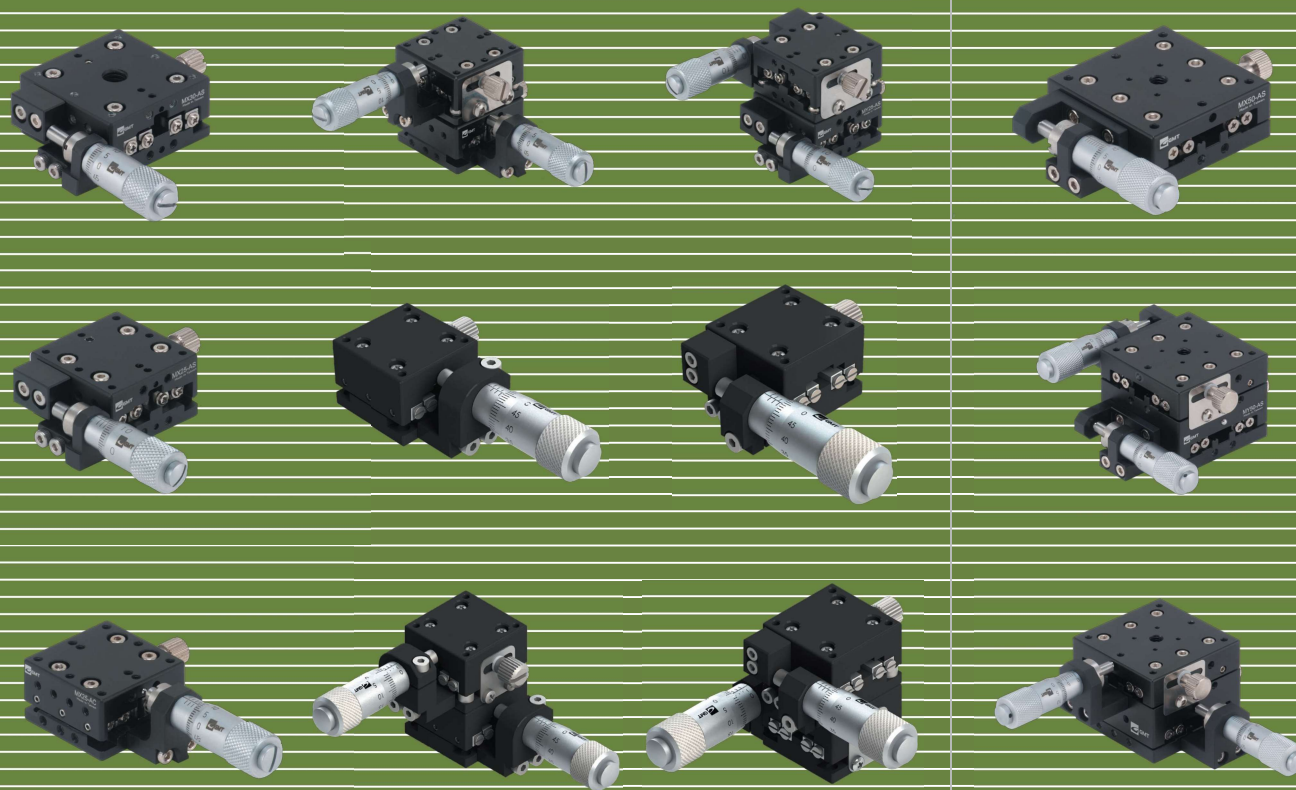

Product
Specification
**Positioning
Stages**


MYW40-AS



MYW60-AS



MYW80-AS



MYW100-AS




Specification


Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish		
MYW40-AS	40*40	XY-axis	Side	±6.5	10	3	1	0.2	Aluminum alloy	Black anodized		
MYW60-AS	60*60			±12.5			3	0.4				
MYW80-AS	80*80						4	0.7				
MYW100-AS	100*100							1.1				


MYW40-AS

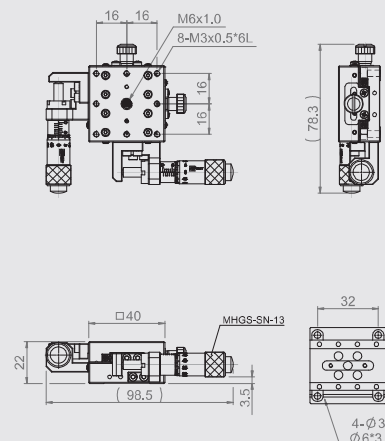


MYW60-AS

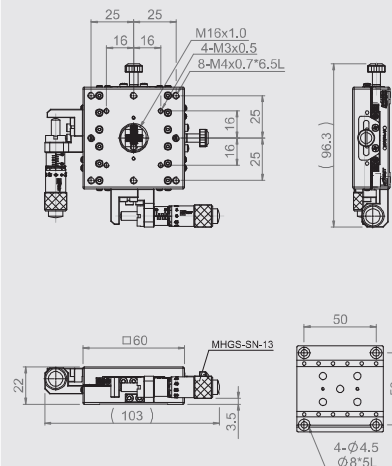


MYW80-AS

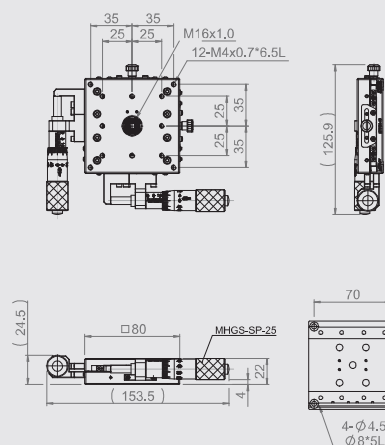

MYW100-AS

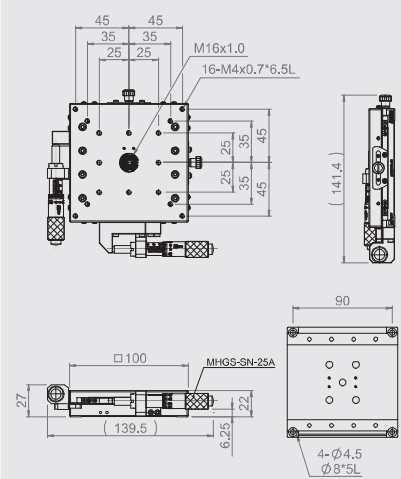

MYW40-AC

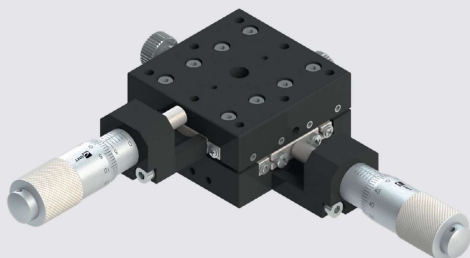

MYW60-AC




Specification

Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MYW40-AC	40*40	XY-axis	Central	±6.5	10	3	1	1	Aluminum alloy	Black anodized
MYW60-AC	60*60							3		

MYW40-AC

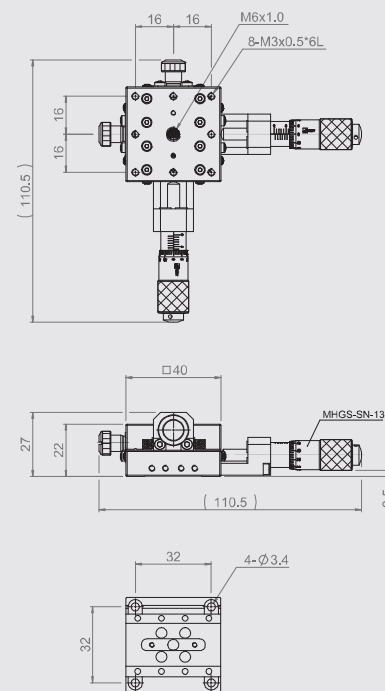

MYW60-AC

