





Product
Specification
**Positioning
Stages**


MZA-60

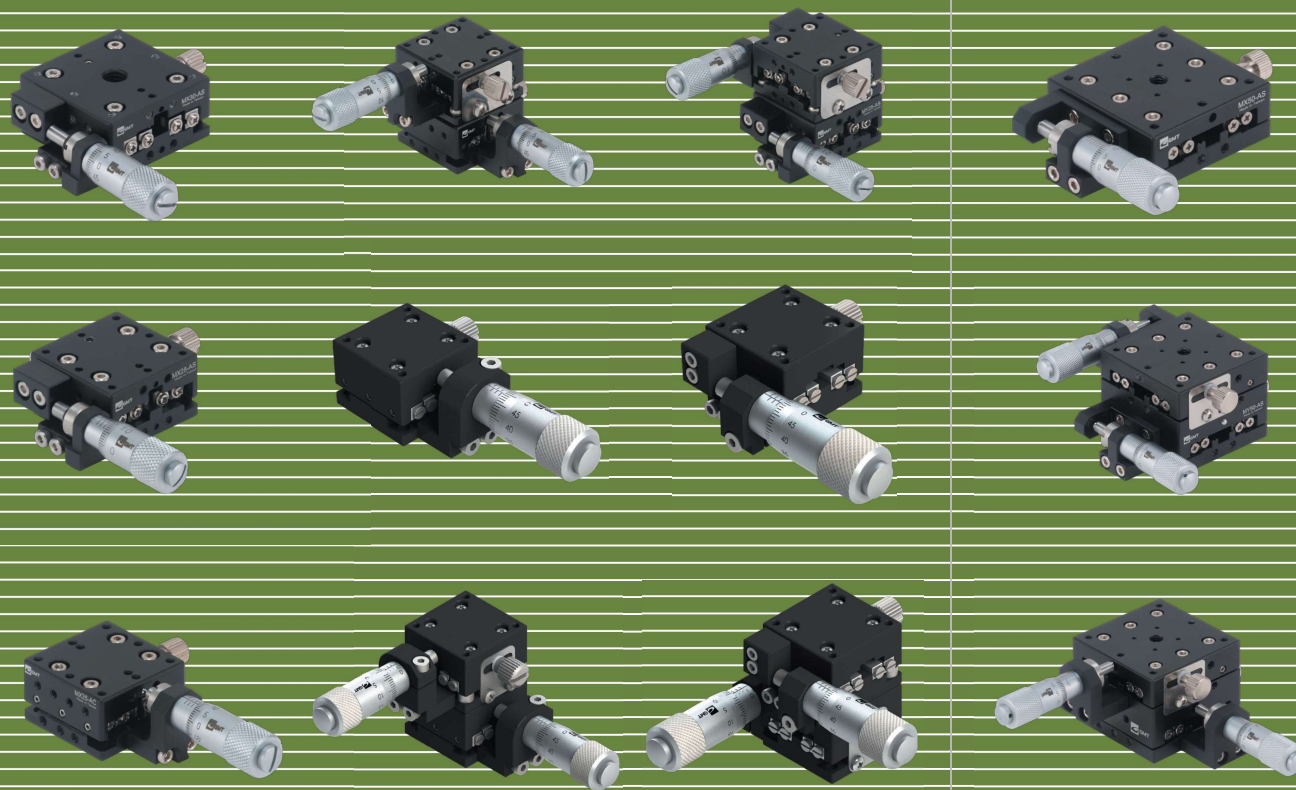

MZA-25

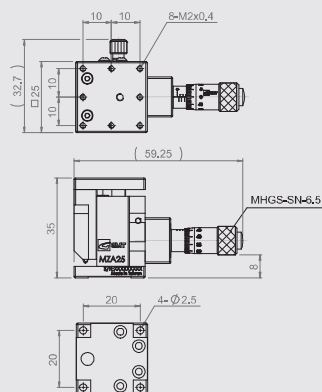

MZA-40

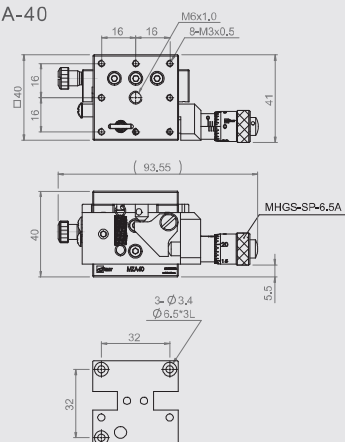


Specification


Model No.	Table Size	Travel Stroke	Micrometer Minimum Reading (μm)	Parallelism (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MZA-25	25*25	± 2.0	10	100	3	1	0.06	Aluminum alloy	Black anodized
MZA-40	40*40	± 3.0				1	0.2		
MZA-40H	40*40	± 3.0				2	0.2		
MZA-60L	60*60	± 3.0				2	0.3		
MZA-60	60*60	± 5.0				4	0.6		
MZA-80	80*80					3	1.0		

Unit : mm


MZA-40H

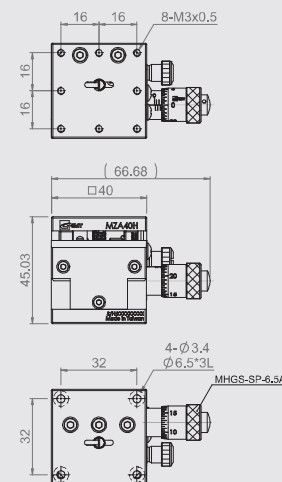


MZA-60L

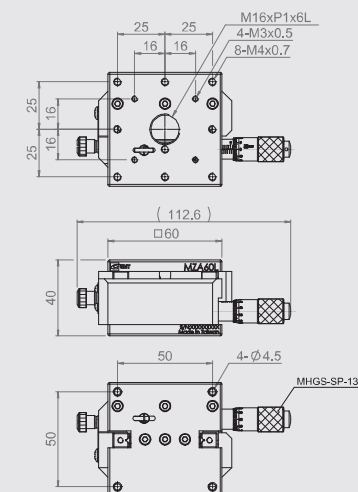



MZA-60

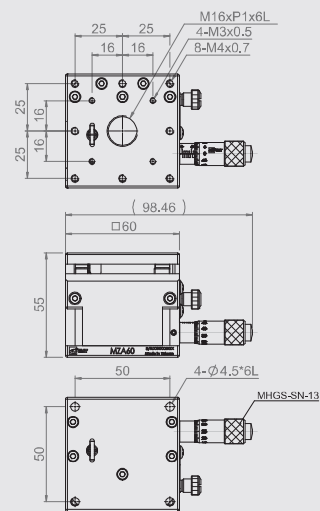

MZA-80

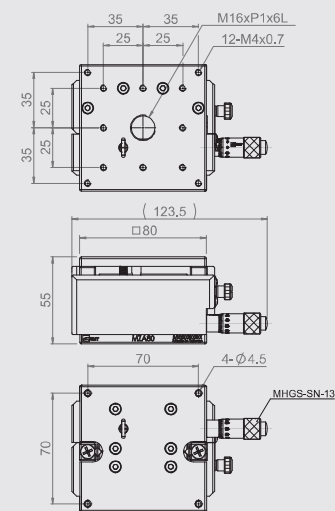

MZA1-5060


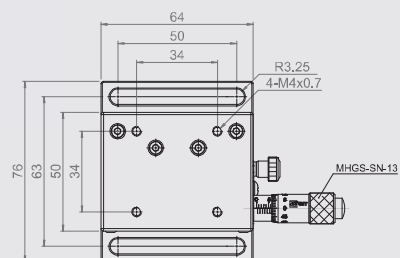


Specification

Unit : mm

Model No.	Table Size	Travel Stroke	Micrometer Minimum Reading (μm)	Horizontal Deviation of Elevation (mm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MZA1-5060	50*64	5	10	0.03	7	0.62	Aluminum alloy	Black anodized
MZA2-5060					8	0.63		
MZA3-5060					10	0.72		

MZA2-5060

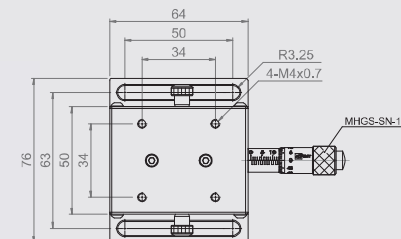

MZA3-5060

