



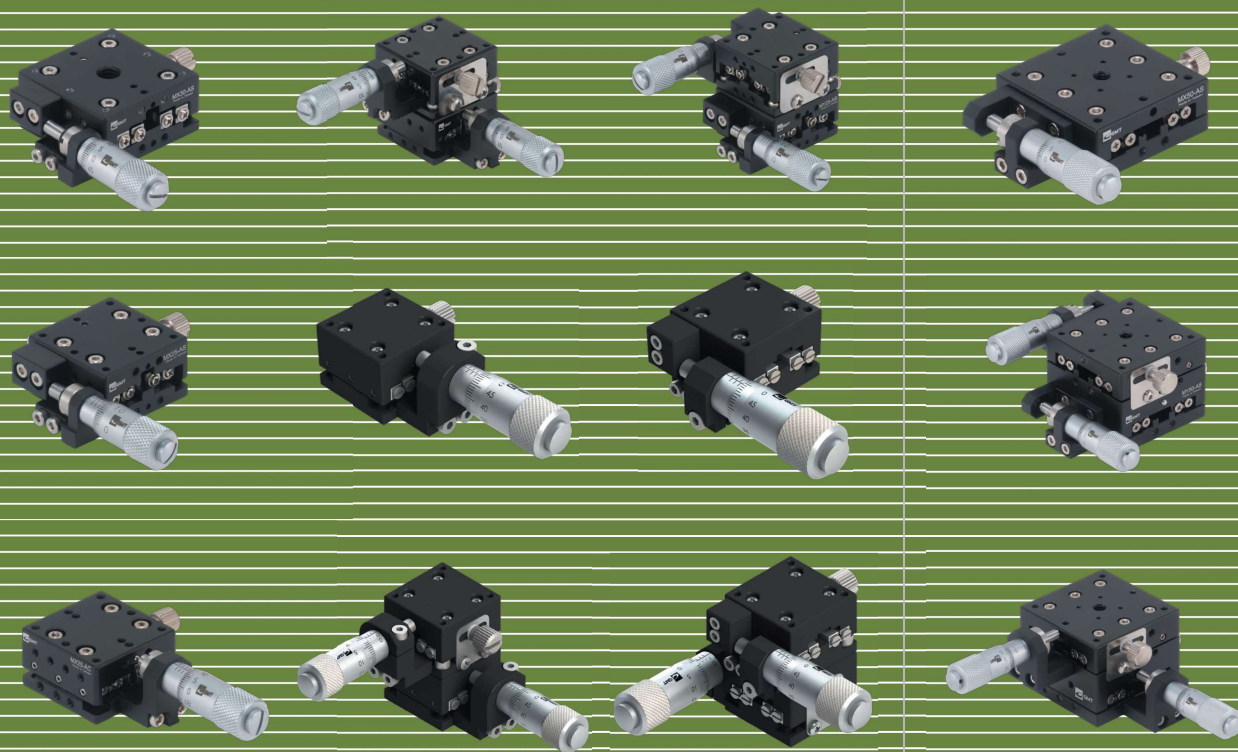

Product
Specification
**Positioning
Stages**

MZL60-SCR

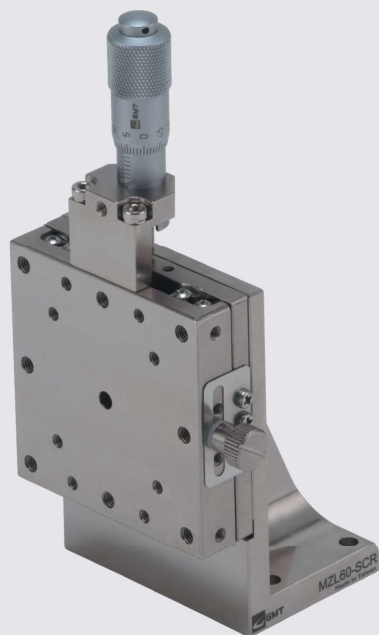


Specification

Model No.	Table Size	Travel Distance	Micrometer Minimum Reading (μm)	Movement Accuracy			Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
				Straightness (μm)	Pitching	Yawing				
MZL25-SCR	25*25	±3.2	10	3	30"	25"	1	0.23	SUS 440C	Electroless nickel plating
MZL40-SCR	40*40	±6.5			25"	15"	5	0.32		
MZL60-SCR	60*60	±12.5						0.58		
MZL80-SCR	80*80	±12.5						1.2		


★ Brackets for Z-axis, refer to P.0195~ P.0196

Unit : mm


MZL25-SCR

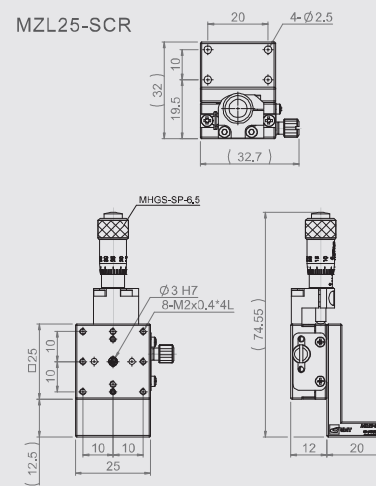

MZL40-SCR

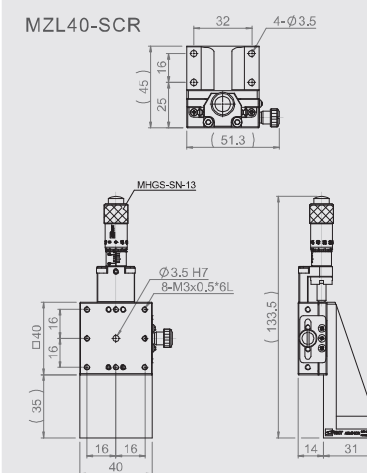

MZL60-SCR

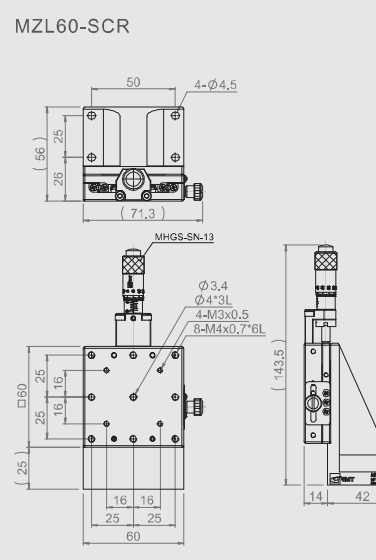

MZL80-SCR

