


SERIE / MODEL
CODICE / CODE

DP-N □□
03.63.□□.01

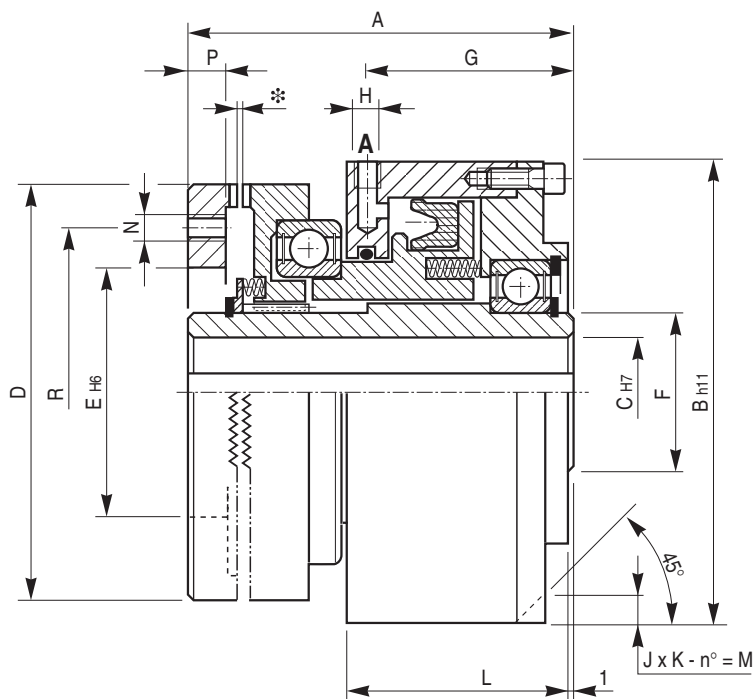

A = Alimentazione aria / Air supply
* Regolazione del traferro / Air gap adjustment = pag. 66

□□	Momento Torque Ms(Nm)	Giri/1' R.P.M. max	Spinta assiale sulla corona dentata Axial thrust on the crown ring (daN)	Volume cilindro Cylinder volume (cm³)	Peso Weight (kg)
00	110	3000	136	8	3,9
01	160	3000	200	12	5,3
02	260	2400	260	17	6,8
03	350	2400	288	18	9,0
04	550	2000	442	38	13,0
05	750	2000	560	45	17,8
06	1300	1600	778	63	25,4
07	2100	1400	948	73	33,5

□□	A	B	C		D	E	F	G	H	J x K	L	M	N	P	R
			min	max											
00	89	108	14	20	92	55	30	48	1/8"	6 x 6	54	3	3 x M6	7	75
01	95	123	15	25	99	62	35	51	1/8"	8 x 8	57	3	3 x M6	8	80
02	101	138	18	34	115	75	45	55	1/8"	8 x 8	61	3	3 x M6	10	95
03	109	145	18	34	124	75	45	58	1/8"	8 x 8	64	3	3 x M6	12	105
04	120	178	20	46	137	95	60	63	1/8"	9 x 9	70	3	6 x M6	12	115
05	130	198	25	50	153	100	65	70	1/4"	10 x 10	78	3	6 x M8	13	130
06	138	228	30	60	178	115	75	74	1/4"	10 x 10	82	4	6 x M8	13	155
07	148	248	30	68	209	130	85	78	1/4"	10 x 10	86	4	6 x M10	16	180