

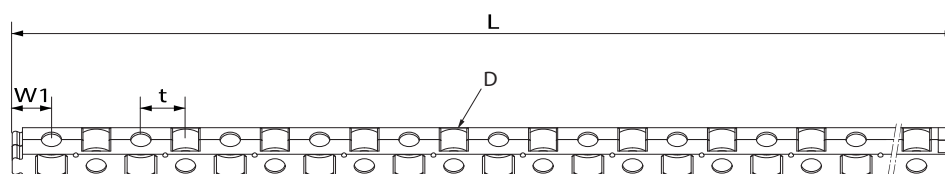


ACCESSORIES

FOR RAILS TYPE RSDE

Roller cage type KRE and KREV size 3, 4 and 6 mm



- Snap-on cage, rollers retained
- Suitable for horizontal and vertical application
- KRE material POM
- KREV material PEEK (suitable for UHV application in size 4 and 6)



Roller cage type KRE and KREV size 3, 4 and 6 mm

- Snap-on cage, rollers retained
- Suitable for horizontal and vertical application
- KRE material POM
- KREV material PEEK (suitable for UHV application in size 4 and 6)

Roller cage with anti creep technology KRE-ACC

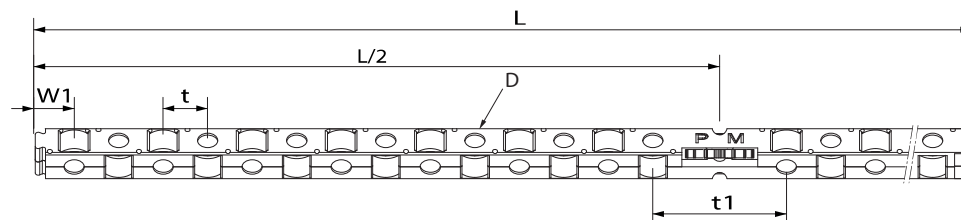


Cage type		Main dimensions							Accessories	
Standard	Stainless steel	D	t	t1	t2	w	w1	L	Suitable for rail	End pieces
R3xKRE	R3xKRE-SS	3	3.3	-	5.1	2.2	2.95	101.6	RSDE- 3	GB
R3xKRE-ACC	R3xKRE-ACC-SS	3	3.3	10.9	5.1	2.2	2.95	101.6		GB
R4xKRE	R4xKRE-SS	4	4.4	13.2	6.7	2.8	3.85	135.3	RSDE- 4	GB
R4xKRE-ACC	R4xKRE-ACC-SS	4	4.4	13.2	6.7	2.8	3.85	135.3		GB
R4xKREV	R4xKREV-SS	4	4.5	13.2	6.7	2.8	on request			GB
R4xKREV-ACC	R4xKREV-ACC-SS	4	4.5	13.2	6.7	2.8				GB
R6xKRE	R6xKRE-SS	6	6.6	19.8	10.6	4.3	6.3	204	RSDE- 6	GB
R6xKRE-ACC	R6xKRE-ACC-SS	6	6.6	19.8	10.6	4.3	6.3	204		GB
R6xKREV	R6xKREV-SS	6	6.7	19.8	10.6	4.3	6.3	204		GB
R6xKREV-ACC	R6xKREV-ACC-SS	6	6.7	19.8	10.6	4.3	6.3	204		GB
R9x...	R9x...-SS	on request							RSDE-9	GB
R9x...-ACC	R9x...-ACC-SS									GB

F = For load direction please refer to picture provided

End screws type GA, size 3 - 9 mm

- For horizontal and vertical application
- For cages type KRE, KREV
- For rails type RSDE




Dimensions	Size			
	3	4	6	9
a	2.4	2.7	3.7	4.2

Order template (adjust as needed): 8 pcs. End screws type GA-6
Stainless steel: 8 pcs. End screws type GA-6-SS

Attachment screws type GD, size 3 - 9 mm

- For compensation of pitch distances between mounting holes
- Recommended for attaching the preload rail
- For rails type RSDE

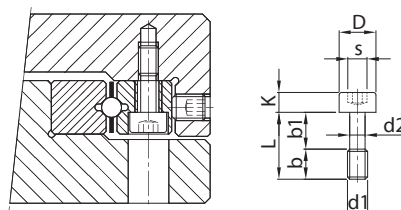

Type	Size								Max. tightening torque (Nm) ¹
	L	b	b1	D	d1	d2	K	s	
GD-3	12	5	7	5	M3	2.3	3	2.5	1.60
GD-4	16	7	9	6.5	M4	3	4	3	3.92
GD-6	20	8	12	8	M5	3.9	5	4	7.68
GD-9	30	12	18	8.5	M6	4.6	6	5	13.60

¹ Strength class 12.9